

REF#:FP-7012

Energy Absorber with Double Lanyards

DESIGN KEY FEATURES

- Webbing lanyard incorporated with Energy absorber
- Anchorage Attachment end of the lanyard equipped with steel scaffold hooks and the connecting attachment end of the lanyard equipped with a steel snap hook

MATERIAL SPECIFICATIONS

WEBBING:

Material: Polyester

Width: 1.18 in. \pm 0.04 in. (30mm \pm 1mm)

STITCHING THREAD:


Material: High-tenacity polyester

LENGTH:

1.8 m

WEIGHT:

1.82 kg

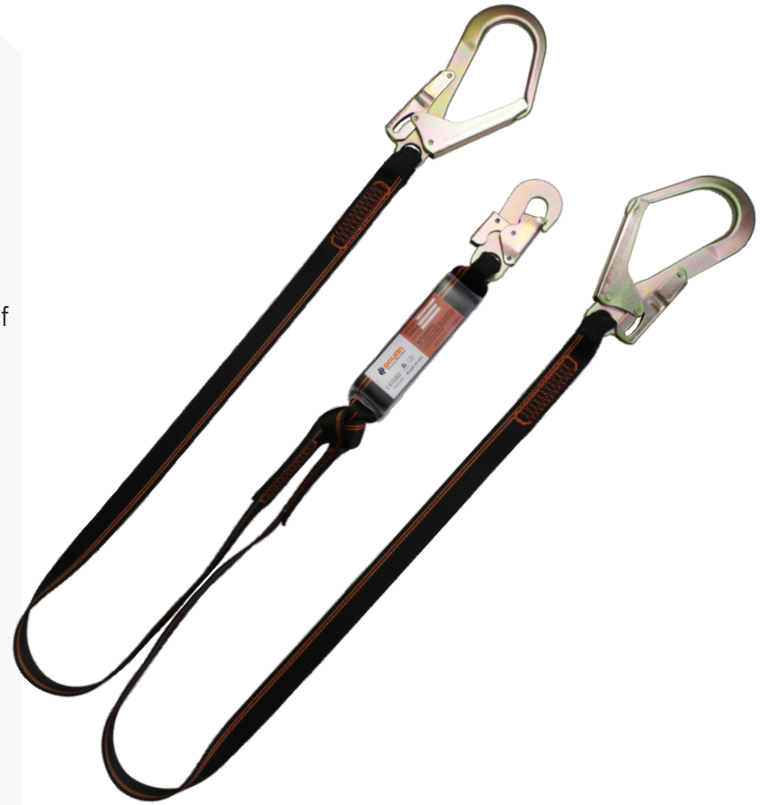

COMPLIANT WITH

Max Static strength	5000 lb
EN Lanyard Class	2 meters
Max. Arrest Distance	1.75 meters
Max. Arrest Force	6 kN
EN User Capacity	100kg

PERFORMANCE SPECIFICATIONS

CERTIFICATION:

Meets or Exceeds EN 355:2002 & VG11 RfU

Scan here to visit website:

