

PRODUCT SPECIFICATIONS

REF#:FP-8023

Six D-Rings Belted X-Type Full Body Harness with Dielectric Friction Buckles

DESIGN KEY FEATURES

- One dorsal dielectric D-ring for fall arrest
- One sternal dielectric D-ring for climbing
- Two shoulder dielectric D-rings for rescue
- Two lateral dielectric D-rings for work positioning
- Shoulder, chest & leg straps with dielectric friction buckles for easy adjustment
- Waist belt with pad for lumbar support

MATERIAL SPECIFICATIONS

WEBBING:

Material: Polyester

Width: 1.73 in. \pm 0.04 in. (44mm \pm 1mm)

Breaking Strength: 5000 lbs.

STITCHING THREAD:

Material: High-tenacity Polyester

METAL COMPONENT:

Material: Alloy Steel core with reinforced Polymer

Finish: Black moulded

PERFORMANCE SPECIFICATIONS

CAPACITY RANGE:

ANSI: 130 - 310 lbs.; OSHA: 420 lbs.


RELEVANT STANDARDS:

Meets or Exceeds EN361:2002, EN358:2018, EN1497:2007

ANSI Z359.11-2021



SIZES

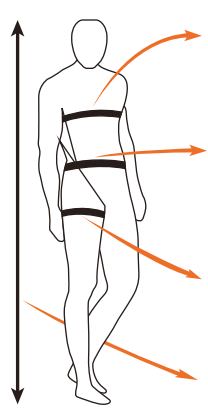

80 cm	≤	Size S	≤	105 cm
90 cm	≤	Size M-L	≤	115 cm
100 cm	≤	Size XL	≤	135 cm
105 cm	≤	Size XXL*	≤	145 cm
65 cm	≤	Size S	≤	105 cm
85 cm	≤	Size M-L	≤	120 cm
105 cm	≤	Size XL	≤	130 cm
115 cm	≤	Size XXL*	≤	135 cm
45 cm	≤	Size S	≤	65 cm
50 cm	≤	Size M-L	≤	75 cm
60 cm	≤	Size XL	≤	80 cm
65 cm	≤	Size XXL*	≤	90 cm
155 cm	≤	Size S	≤	175 cm
165 cm	≤	Size M-L	≤	188 cm
170 cm	≤	Size XL	≤	200 cm
175 cm	≤	Size XXL*	≤	205 cm

Scan here to visit website:

