

PRODUCT SPECIFICATIONS



REF#:FP-8013

Three D-Rings Non-belted Full Body Harness with FR Webbing and Dielectric Pass Thru Buckles

DESIGN KEY FEATURES

- 5-point adjustable full body harness made with FR webbing
- One dorsal dielectric D-ring for fall arrest
- Shoulder, chest & leg straps with dielectric friction buckles for easy adjustment
- Two lateral dielectric D-rings for work positioning

MATERIAL SPECIFICATIONS

WEBBING:

Material: Aramid

Width: 1.73 in. $\pm$ 0.04 in. (44mm $\pm$ 1mm)

Breaking Strength: 5000 lbs.

STITCHING THREAD:

Material: Kevlar

METAL COMPONENT:

Material: Alloy Steel core with reinforced polymer

Finish: Black moulded

PERFORMANCE SPECIFICATIONS

CAPACITY RANGE:

ANSI: 130 - 310 lbs.; OSHA: 420 lbs.


RELEVANT STANDARDS:

Meets or Exceeds EN361:2002, EN358-2018

ANSI Z359.11-2021, ASTM F887-20



SIZES

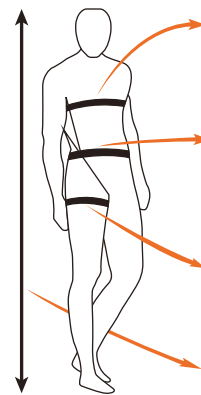

80 cm	≤	Size S	≤	105 cm
90 cm	≤	Size M-L	≤	115 cm
100 cm	≤	Size XL	≤	135 cm
105 cm	≤	Size XXL*	≤	145 cm

65 cm	≤	Size S	≤	105 cm
85 cm	≤	Size M-L	≤	120 cm
105 cm	≤	Size XL	≤	130 cm
115 cm	≤	Size XXL*	≤	135 cm

45 cm	≤	Size S	≤	65 cm
50 cm	≤	Size M-L	≤	75 cm
60 cm	≤	Size XL	≤	80 cm
65 cm	≤	Size XXL*	≤	90 cm

155 cm	≤	Size S	≤	175 cm
165 cm	≤	Size M-L	≤	188 cm
170 cm	≤	Size XL	≤	200 cm
175 cm	≤	Size XXL*	≤	205 cm

Scan here to visit website:



© copy right
all rights reserved

Poyan (Shanghai) Industry Co.Ltd

Building 1J, No. 2222 Huancheng Road, Jiading District, Shanghai
poyan@poyansafety.com

<https://poyansafety.com>